



The Clemons Check Valve

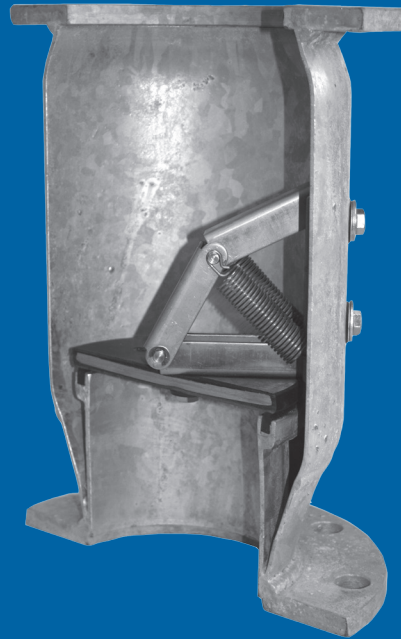

Rubber
to
Rubber
Pictured

All the features you need:

- Stainless Steel hinge assembly and springs
- New machined gate seat insures positive seal
- Spring loaded - Prevents hammering
- Rubber to rubber seats available 6", 8", 10" & 12"
- Fully Opening
- Vulcanized rubber gate
- Galvanized body
- Working pressure: 125#
- Flanged or bare ends available standard
- Available in sizes 4, 6, 8, 10 and 12
- Chemigation styles available

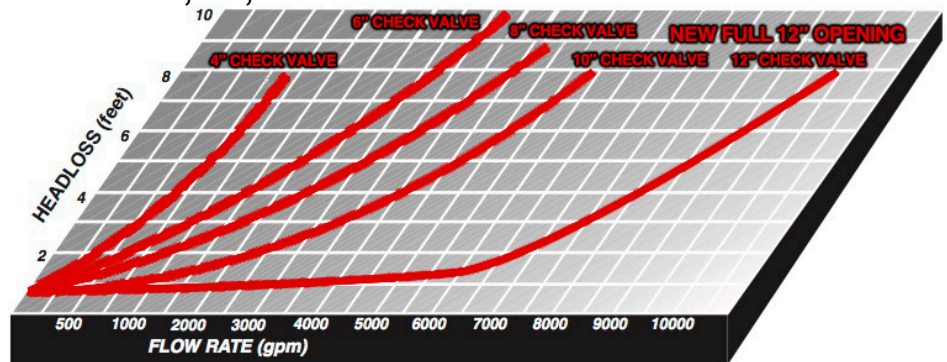

Manufacturers and Distributors of Irrigation and Industrial Equipment
6983 Supply Way • Boise, Idaho 83716
(208) 345-2525 / Toll Free 1-800-635-5975
FAX 1-208-345-2143
www.clemonssales.net
e-mail purchasing@clemonssales.net