


304 STAINLESS STEEL REPLACEMENT PARTS FOR CHECK VALVES, FOOT VALVES AND CHEMIGATION VALVES

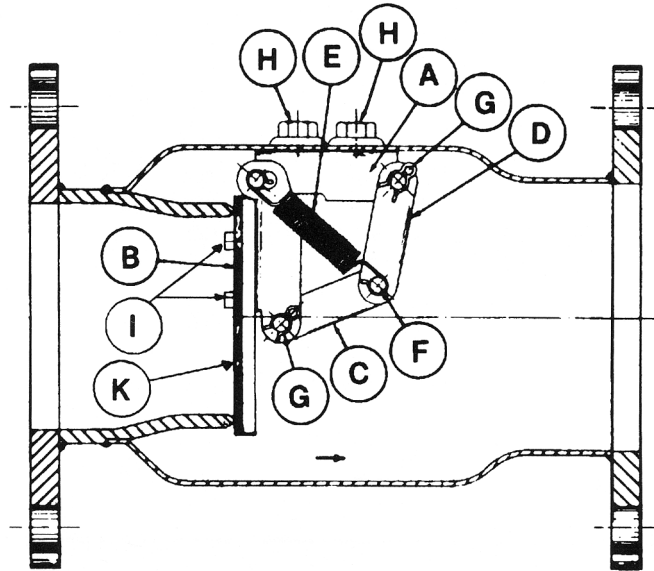


No. 3080

Mounting link bolts are special – DO NOT substitute with standard screws.

VALVE SIZE

4" 5" 6" 8" 10" 12"

- A. Mounting Link S.S.
- B. Gasket Plate Link S.S.
- C. Inner Link S.S.
- D. Outer Link S.S.
- E. Link Spring S.S. (2 reqd.)
- F. Link Pin S.S. (4 reqd.)
- G. Link Pin Clip S.S. (12 reqd.)
- H. Mounting Link Screw (2 reqd.) – Plated
- I. Plate Link Screw (2 reqd.) – Plated
- J. Plate Link Nuts (2 reqd.) – Plated
- K. Gasket Plate – Plated
- L. Complete Plate & Spring Assembly
New Rubber O-Ring Seat

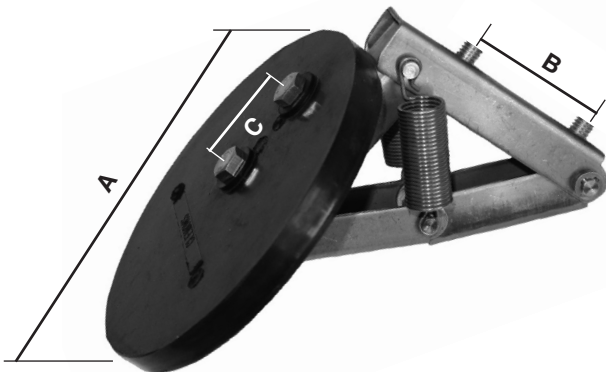

No. 3080-L

SIZE	DIMENSIONS			WEIGHT
	A	B	C	
4"	4.5"	2.5"	1.18"	2.2
5"	5.5"	2.5"	1.63"	2.9
6"	6.5"	2.5"	1.63"	3.7
8"	8.63"	3.0"	2.63"	7.9
10"	10.75"	4.25"	3.63"	11.7
12"	12.75"	4.5"	4.25"	16.3